


DOUBLE LEAF GATES

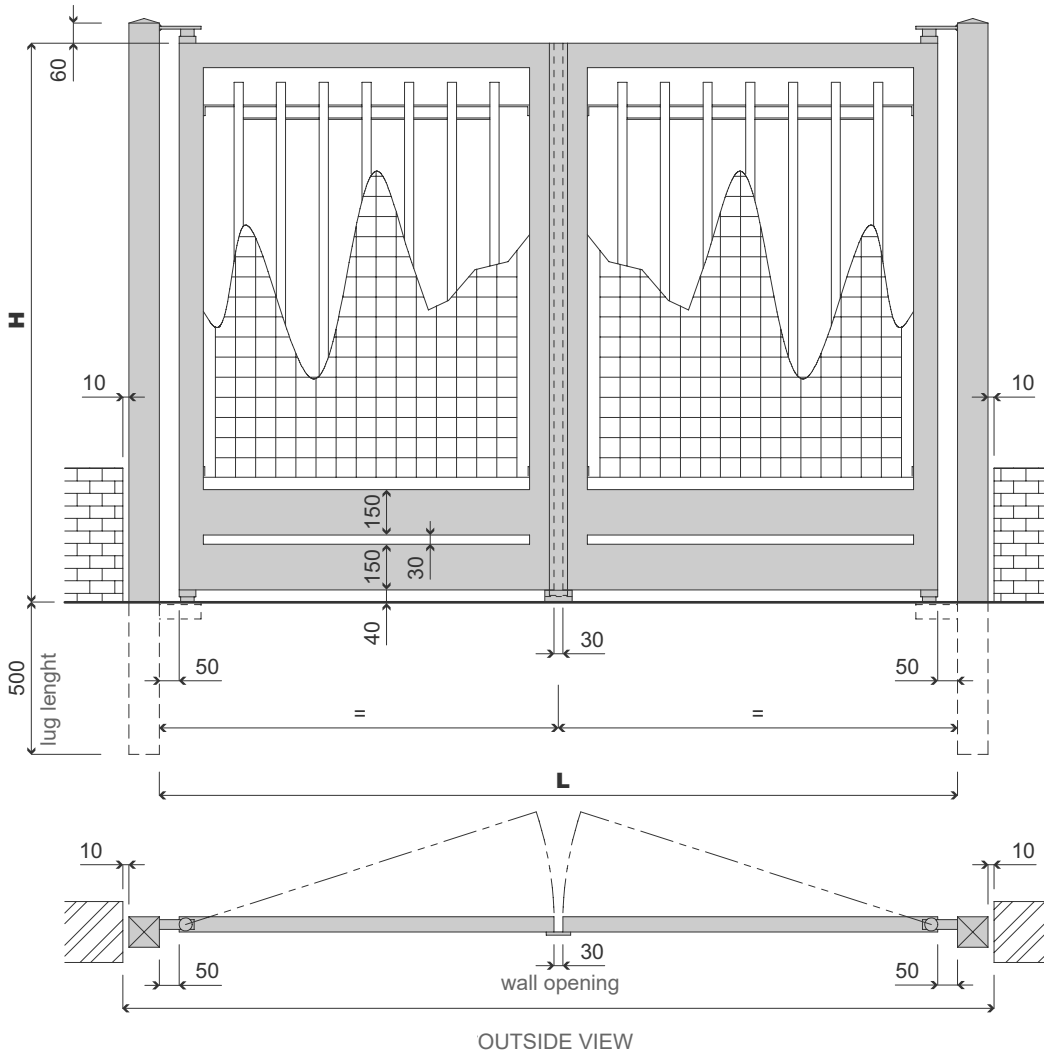

**UNI EN 13241-1
(UE) N. 305/2011**

Material

S235JR UNI EN 10025:05 steel
AISI 304L stainless steel (by request)

Treatment

hot galvanising UNI EN ISO 1461:09
polyester powder coating over galvanising

Fixings

standard M8x25 stainless steel bolt
anti-theft M8x25 stainless steel bolt

*** BY REQUEST GATES TO SIZE
WITH CERTIFICATION**

STANDARD SUPPLY

- n° 2 tubular frames
- n° 2 stanchions
- n° 4 ball bearing hinges
- n° 1 galvanised electric lock
- n° 1 central bolt
- n° 1 ground stop
- n° 2 security cables
- bottom rail with band
- mirror as chosen

ACCESSORIES BY REQUEST

- stainless steel electric lock
- manual lock with galvanised handle
- stanchion cover with hole for flashing light
- rear stop
- draining hinges
- hinges with plate for anchor bolting (without stanchion)
- draining hinges with 180° opening
- ball bearing hinges with 180° opening
- panic handle
- spring loaded bolt for panic handle
- bottom rail with 2/3 bolt or in diamond pointed plating

STANDARD DIMENSIONS*

Opening (L)	Height (H)	Stanchions
mm	mm	mm
Min 1000	Min 1000	Min 100 x 100
q	q	q
Max 8130	Max 2500	Max 200 x 200