STAIR TREADS

in pressed open grids

Material
- S235JR UNI EN 10025:05 steel
- AISI 304 raw and pickled stainless steel
- alluminium allows (by request)

Treatment
hot galvanising UNI EN ISO 1461:09

with plates drilled (in accordance with the UNI 11002-2 standard) and view-breaker angle iron

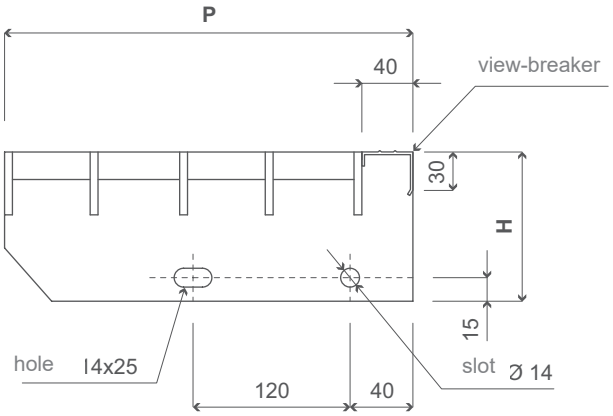

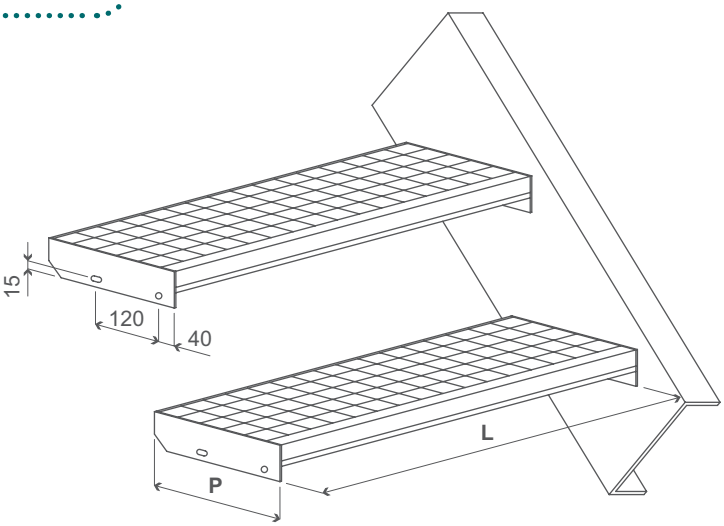

TYPE OF USE		SECONDARY PRIVATE	P = 265	L = 600 - 799
		MAIN PRIVATE	P = 265	L = 800 - 1200
		PUBLIC	P = 315	L = 1201 - 1800

OPEN GRID			TREAD LENGTH (L)														plate H
type	mesh	plate	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	
HEEL PROOF	15x66	25x2															60
		30x2															60
		40x3															70
		50x3															80
	44x15	25x2															60
		30x2															60
		40x2															70
	66x15	30x2															60
		40x2															70
STANDARD	22x66	30x2															60
		40x3															70
		50x3															80
	33x66	25x2															60
		30x2															60
	44x33	25x2															60
		30x2															60
		40x2															70
	66x33	25x2															60
		30x2															60
		40x2															70